




**ECO-LITE PAR38
Pure White™ LED "SPIRAL"**

Lumen Output: 5000K - 1092
Power Consumption: 18W
Efficacy: 5000K - 61 (lm/w)
Color Temperature: 5000K
Color Rendering Index (CRI): 85
Beam Spread: 25° (Narrow Flood) and 40° (Flood)
Rated Life: 50,000 Hours, 70%
Housing: Anodized
Socket E26: Edison base
Operating Temp: -20°C to +40°C
MOL: 5.08", 129mm
Max Ambient Temperature: 25°C
Voltage: 120 VAC
Weight: 1.54lbs., 0.70kg
Power Factor: ≥.70
Warranty: 5 year limited
Standards: UL1993, E320663-Pending

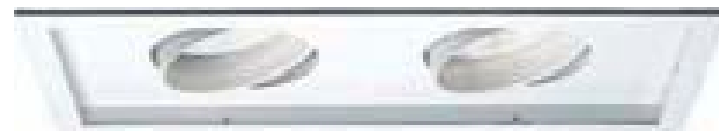

ECO-LITE
P R O D U C T S

33 Rockland Park Ave, Tappan, NY 10983

Tel. 800-345-9652 Fax 845-365-9777

www.eco-lite.com



Par38/18W/5K/FL

DISTANCE TO PLANE	INITIAL FOOTCANDLES	BEAM DIAMETER
2'	500	24"
3'	215	30"
4'	125	36"
5'	90	42"
6'	55	48"
7'	45	60"
8'	35	72"
9'	27	78"
10'	22	84"



Par38/18W/5K/NFL

DISTANCE TO PLANE	INITIAL FOOTCANDLES	BEAM DIAMETER
2'	1000	15"
3'	500	18"
4'	365	24"
5'	215	30"
6'	135	36"
7'	110	42"
8'	85	48"
9'	65	60"
10'	50	66"